


Reliable, Cost Effective, Easy-to-Manage Server Board in a microATX Form Factor

Intel® Server Board S1200SP Product Family featuring Intel® Xeon® processor E3-1200 v5 family

SMB, Embedded, Storage and Security Appliance Applications

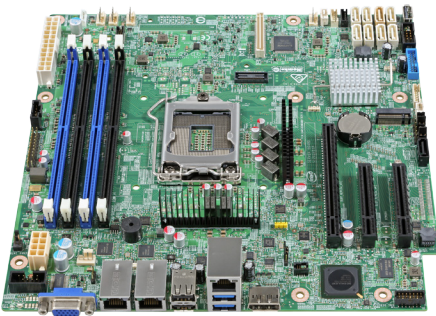

Outstanding Performance with Manageability

Small businesses need a robust and cost effective server that can scale as they grow. The Intel® Server Board S1200SP Product Family meets this need in a pedestal or rack system that scales via SATA and PCIe* expansion options for increased storage, functionality or faster networking speed. The Intel® Xeon® processors E3-1200 v5 product family has the processing to deliver reliability, durability and performance with server management features that make this server ideal for SMB, embedded, and storage and security appliance applications.

Key Features

- Intel Xeon processors E3-1200 v5 performance with dual 1GBase-T connectivity
- Maximum memory via four DDR4 ECC UDIMM sockets, supporting 2133MT/S memory
- High expansion with up to 3 PCIe Gen3 x8 expansion slots, SAS and IO Module options
- Storage flexibility with up to 8 SATA 6G drives, SATA DOM and M.2 options
- Server Management features including a 1GBase-T dedicated management port, IPMI* 2.0 and BMC, and optional Remote Management Key



System Level Options for Flexibility and Choice

The S1200SP is configurable with both a rack-mount or pedestal chassis, making it versatile for office or data center installations.

- **Intel® Server System R1000SPO:** 1U Rack System based on the S1200SPO server board, ideal for embedded, storage or security appliances and web hosting rack installations
- **Intel® Server Chassis P4000-S family:** 4U Pedestal chassis for the S1200SPL and S1200SPS boards, supporting higher PCIe flexibility is ideal for SMB applications



Built with Intel® Quality, Reliability and Performance

Intel® Server Products are backed by Intel's design excellence and manufacturing expertise to deliver processing power with high levels of flexibility, manageability and reliability. Product and design quality is paired with 3-year standard warranties and robust technical and incident resolution support to ensure customer satisfaction.

INTEL SERVER BOARD S1200SP SPECIFICATIONS

Server Board Specification	S1200SPL	S1200SPS	S1200SPO
On Board LAN	2x 1GbE (i210)	2x 1GbE (i210)	2x 1GbE (i210)
Board Dimensions	microATX 9.6" x 9.6"	microATX 9.6" x 9.6"	microATX 9.6" x 9.6"
CPU	Single Intel® Xeon® processor E3-1200 v5, up to 80W TDP	Single Intel® Xeon® processor E3-1200 v5, up to 80W TDP	Single Intel® Xeon® processor E3-1200 v5, up to 80W TDP
Socket	Socket-H4 LGA1151	Socket-H4 LGA1151	Socket-H4 LGA1151
Chipset	Intel® C236 chipset	Intel® C232 chipset	Intel® C232 chipset
Memory Type	DDR4 UDIMM ECC at 2133MT/s maximum	DDR4 UDIMM ECC at 2133MT/s maximum	DDR4 UDIMM ECC at 2133MT/s maximum
Memory Capacity	4 DIMMs, 64GB total	4 DIMMs, 64GB total	4 DIMMs, 64GB total

External I/O Connectors	S1200SPL	S1200SPS	S1200SPO
USB	Two USB 2.0 and two USB 3.0 ports on back panel	Two USB 2.0 and two USB 3.0 ports on back panel	Two USB 2.0 and two USB 3.0 ports on back panel
Ethernet	Dual 1GBase-T (RJ45) Single 1GBase-T dedicated server management port (RJ45)	Dual 1GBase-T (RJ45)	Dual 1GBase-T (RJ45) Single 1GBase-T dedicated server management port (RJ45)
Video	GT2 Graphics (Display Port) VGA graphics via BMC (DB-15 VGA) (GT2 graphics)	VGA graphics via BMC (DB-15 VGA)	VGA graphics via BMC (DB-15 VGA)

Internal I/O Connectors and Headers	S1200SPL	S1200SPS	S1200SPO
USB	One Type A USB 2.0 connector Two USB 2.0 ports via header for front panel Two USB 2.0/3.0 ports via header for front panel	One Type A USB 2.0 connector Two USB 2.0 via header for front panel	One Type A USB 2.0 connector Two USB 2.0 ports via header for front panel Two USB 2.0/3.0 ports via header for front panel One 2x10 pin connector providing front panel support for up to two USB2.0/3.0 ports
Serial Port	One DH-10 Serial Port connector	One DH-10 Serial Port connector	One DH-10 Serial Port connector
SSI Front Panel	One 2x12 pin SSI front panel header	One 2x12 pin SSI front panel header	One 2x12 pin SSI front panel header
SATA	Eight SATA3 via 7-pin SATA connectors	Six SATA3 via 7-pin SATA connectors	Eight SATA3 via 7-pin SATA connectors
SATADOM	SATA 4 connector for Apacer* SATADOM	SATA 4 connector for Apacer* SATADOM	SATA 4 connector for Apacer* SATADOM
TPM	One TPM 1.2 module, 2x7 pin connector	None	One TPM 1.2 module, 2x7 pin connector
Intel® Remote Management Module 4 (Intel® RMM4)	One 2x4 pin connector for Intel RMM4 key (AXXRMM4LITE), KVM and remote media redirection	None	One 2x4 pin connector for Intel RMM4 key (AXXRMM4LITE), KVM and remote media redirection

Expansion Type	S1200SPL	S1200SPS	S1200SPO
I/O Modules	One proprietary slot for a x4 Intel® Integrated RAID Module	None	One proprietary slot for a x8 Intel® I/O Expansion Module
PCIe Slots	1 PCIe Gen3 x8 w/ x16 connector 1 PCIe Gen3 x4 w/ x8 connector 1 PCIe Gen3 x8 w/ x8 connector	1 PCIe Gen3 x8 w/ x16 connector 1 PCIe Gen3 x4 w/ x8 connector 1 PCIe Gen3 x8 w/ x8 connector	1 PCIe Gen3 x8 w/ x16 connector
M.2	One M.2 connector, 22x42mm	None	One M.2 connector, 22x42mm

For product specifications visit: ark.intel.com

INTEL® SERVER SYSTEM R1000SPO SPECIFICATIONS

1U Specifications	R1304SPOSHBN	R1304SPOSHOR	R1208SPOSHOR
Server Board	S1200SPO, server board installed		
Dimensions	43.5mm x 428mm x 535mm (Height X Width X Depth)		
PSUs per system	One 350W, fixed	Two 450w, redundant	Two 450w, redundant
Storage	4x3.5" hot-swap backplane	4x3.5" hot-swap backplane	8x2.5" hot-swap backplane

INTEL® SERVER CHASSIS SPECIFICATIONS

4U Specifications	P4000XXSFDR	P4304XXSFCN	P4304XXSHCN
Server Board	S1200SPL and S1200SPS, server board purchased separately		
Dimensions	17.24 in (438 mm) x 6.81 in (173mm) x 22.05 in (560 mm) (Height X Width X Depth)		
PSUs per chassis	Two 460W, cold redundant	One 365W, fixed	One 365W, fixed
Fans	One PCIe* zone, one rear system fan	One rear system fan	One rear system fan
Storage	4x3.5" fixed drive trays	4x3.5" fixed drive trays	4x3.5" hot-swap backplane

STORAGE OPTIONS WITH INTEL® SERVER CHASSIS P4000XXSFDR

Storage Options	Size	# of Drives	Type
Default	3.5"	Four (4)	Fixed SATA drives
Upgrade option 1	3.5"	Four (4)	Hot-swap 6Gbps SATA drives (FUP4X35HSDK)
Upgrade option 2	3.5"	Eight (8)	Hot-swap 6Gbps SATA drives (FUP8X35HSDK)
Upgrade option 3	3.5"	Four (4)	Hot-swap 12Gbps SAS drives (FUP4X35S3HSDK)
Upgrade option 4	3.5"	Eight (8)	Hot-swap 12Gbps SAS drives (2x FUP4X35S3HSDK)
SATA DOM	SATA DOM	One	Support one internal SATA Disk-on-Modules mounted directly on the onboard SATA 4 port. Validated with Apacer* SATADOM
SAS Support	NA	NA	Optional SAS ROC via Intel® Integrated RAID module connector, required to support SAS drives

ORDER CODES: SERVER BOARD AND CHASSIS

Order Code	Type	Description
DBS1200SPL	Board	Intel Server Board S1200SPL, Disti 5 pack
DBS1200SPS	Board	Intel Server Board S1200SPS, Disti 5 pack
P4000XXSFDR	Chassis	Intel® Server Chassis P4000XXSFDR, pedestal chassis with 4 x 3.5 fixed hard drive trays, 2 x 460W cold redundant power supplies
P4304XXSFCN	Chassis	Intel Server Chassis P4304XXSFCN, pedestal chassis with 4x3.5 fixed hard drive trays, one 365W fixed power supply
P4304XXSHCN	Chassis	Intel Server Chassis P4304XXSHCN, pedestal chassis with 4x3.5 hot-swappable hard drive backplane, one 365W fixed power supply
R1304SPOSHBN	System	Intel Server System R1304SPOSHBN, 1U rack system with 4x3.5 hot-swappable hard drive backplane, one 350W fixed power supply
R1304SPOSHOR	System	Intel Server System R1304SPOSHOR, 1U rack system with 4x3.5 hot-swappable hard drive backplane, two 450W redundant power supplies
R1208SPOSHOR	System	Intel Server System R1208SPOSHOR, 1U rack system with 8x2.5 hot-swappable hard drive backplane, two 450W redundant power supplies

For product specifications visit: ark.intel.com

ORDER CODES: 12GBPS SAS 3.0 INTEL® INTEGRATED RAID MODULES

Order Code	Description
RMS3CC080	8 port, Intelligent Hardware RAID, LSI3108 ROC, RAID 0, 1, 10, 5, 50, 6, 60
RMS3CC040	4 port, Intelligent Hardware RAID, LSI3108 ROC, RAID 0, 1, 10, 5, 50, 6, 60
RMS3HC080	8 port, Mid-Tier RAID, LSI3008 IOC, JBOD & RAID 0, 1, 10, Hybrid 5/50

For additional RAID modules and add-in-cards, visit www.intel.com/go/RAID




For more information on Intel® server solutions visit: intelserveredge.com

For more information on Intel® Server Products visit: intel.com/intelserverproducts

For more information on Intel® RAID visit: intel.com/go/raid

For product specifications visit: ark.intel.com



Product does not include memory, processors, or hard drives. For compatibility information please refer to the configuration guide at www.intel.com/support.

Results have been estimated or simulated using internal Intel analysis or architecture simulation or modeling, and provided to you for informational purposes. Any differences in your system hardware, software or configuration may affect your actual performance.

Intel technologies' features and benefits depend on system configuration and may require enabled hardware, software or service activation. Performance varies depending on system configuration. No computer system can be absolutely secure. Check with your system manufacturer or retailer or learn more at ark.intel.com

Intel, the Intel logo, Intel Inside, Xeon are trademarks of Intel Corporation in the U.S. and/or other countries.

*Other names and brands may be claimed as the property of others.

© 2016 Intel Corporation.

0416/JS/GO/PDF

333461-004US