


POINT-OF-SALE
ACCESS CONTROL
ATM. KIOSK


Facial Authentication Evaluation Kit




REALSENSE™

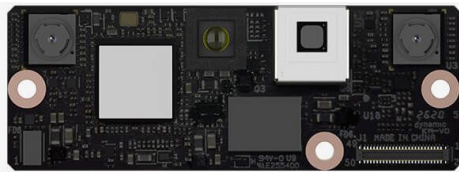


Realsense
Camera ID Solution
F450 Module

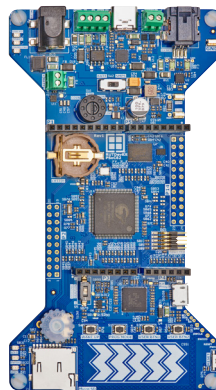

Dev Board
MCU + PMIC
RDK2

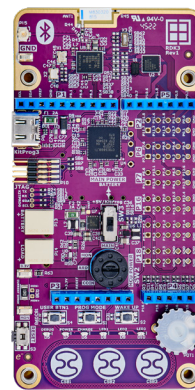

Wireless Dev Board
Secure MCU; BLE
RDK3

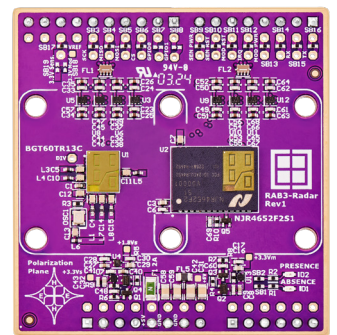

Radar Board
Module & Sensor
RAB3

Features / Options

- Wireless interface to the dev boards
(1) BLE via the Rutronik System Solution app
(2) DECT NR+ via a laptop
- UART communication to the camera
- Presence detection with radar sensor
- Open source SDK
- Arduino interface

Easy Enrollment



No Photos Stored



Fast Authentication




Secure Anti-Spoofing



Authenticates in Less
than a Second


RDK2

Capacitive touch sensor
Dip switch, potentiometer
Headers for GPIO accessibility

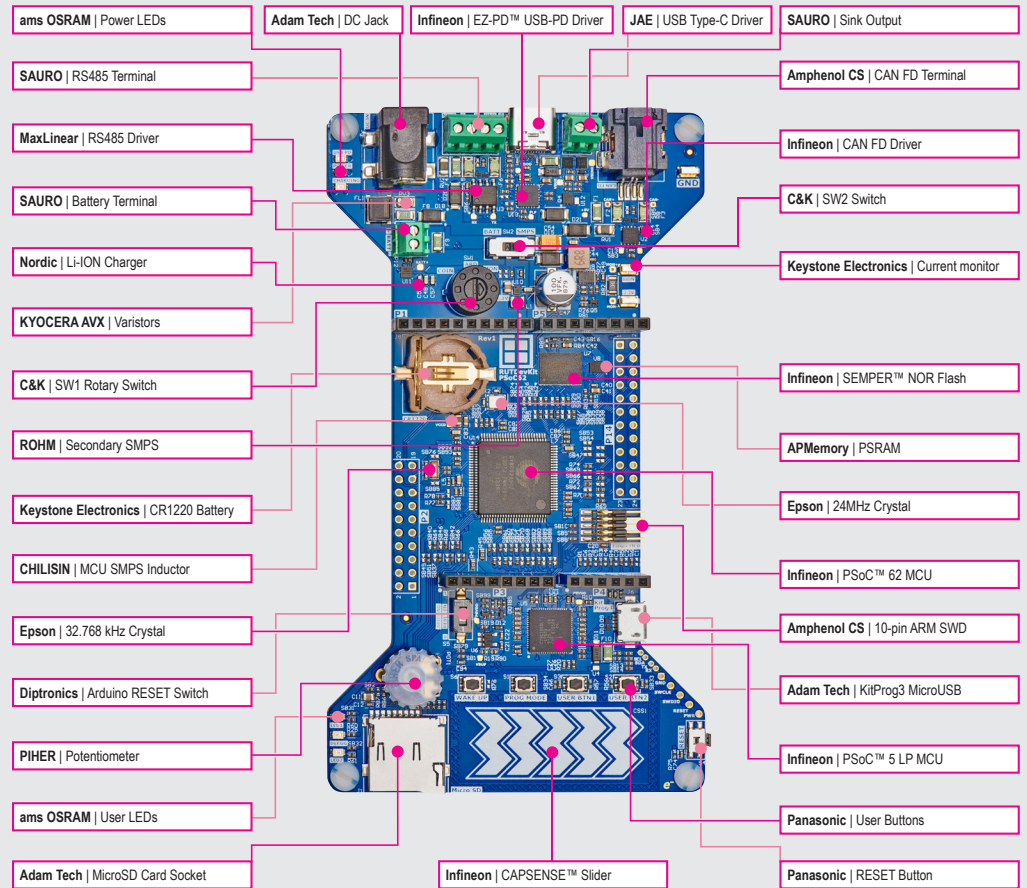

RDK3

High-security features
Ultra-low-power Bluetooth
Headers for GPIO accessibility

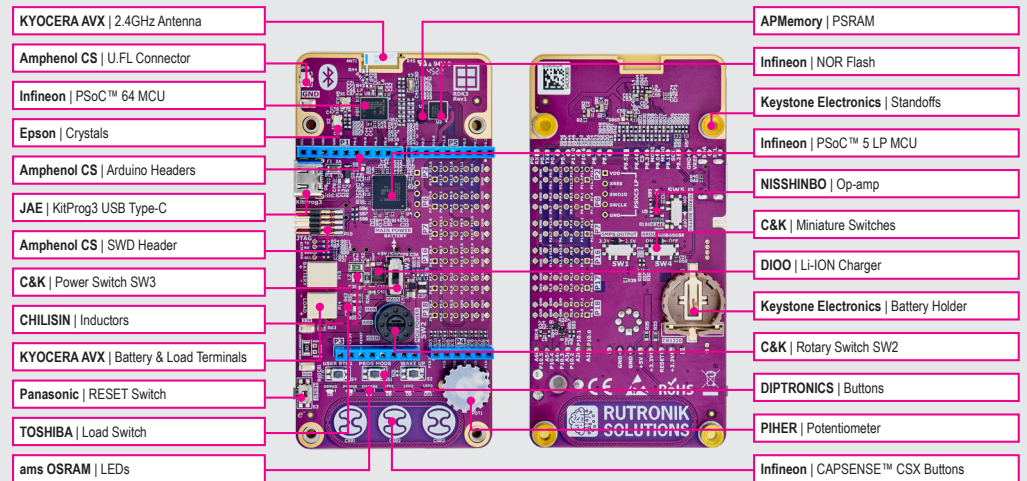

RAB3

Presence detection
People counting
Distance measurement

