


# Apacer

The Most **Reliable**  
Storage For Industries


PV140-25

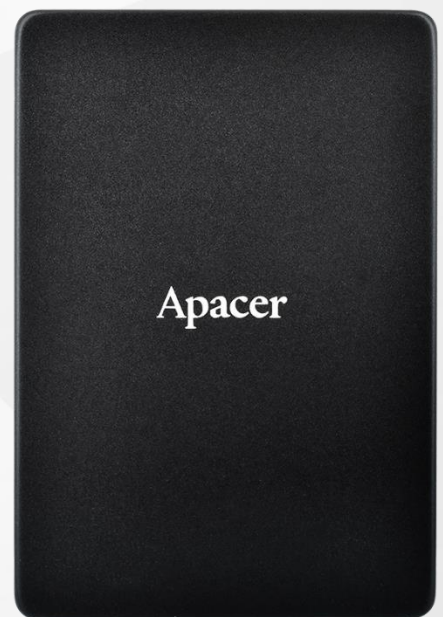

## PV140-25

### Overview

Apacer PV140-25 is the fastest Solid State Drive (SSD) designed with U.2 mechanical dimensions, providing full compliance with PCIe Gen3 x4 interface and NVMe 1.3 specifications. Built with a powerful PCIe controller, PV140-25 delivers outstanding performance in data transfer, reaching up to 574,000/266,000 and 3,340/1,175MB/s in IOPS and sequential read/write. PV140-25 utilizes 3D NAND for higher capacity up to 3,840GB, making it the ideal choice for rugged, embedded applications.

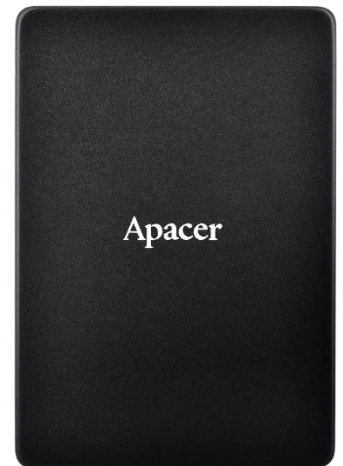

Regarding reliability, PV140-25 is implemented with LDPC (Low Density Parity Check) ECC engine to extend SSD endurance and increase data reliability. For highly-intensive applications, End-to-End Data Protection ensures that data integrity can be assured at multiple points in the path to enable reliable delivery of data transfers, while Advanced Encryption Standard (AES) ensures data security and provides users with a peace of mind knowing their data is safeguarded at all times.

\* The actual available memory on the device is less than what is listed on the package. This is due to small discrepancies in file formats and algorithms used by various operating systems. In addition, a portion of memory space is reserved for system files and data sectors for better performance.


## Feature

- Adopts advanced LDPC ECC engine with 3D NAND flash memory to improve reliability
- Global Wear Leveling
- Flash bad-block management
- Flash Translation Layer: Page Mapping
- Supports SSDWidget S.M.A.R.T function
- Power Failure Management
- AES 256-bit hardware encryption
- End-to-End Data Protection
- TRIM Support
- Over-Provisioning
- SMART Read Refresh™
- NVMe Secure Erase

## Specifications

<b>Model</b>	PV140-25
<b>Interface</b>	PCIe Gen3 x4
<b>Connector</b>	U.2 (SFF-8639)
<b>Form Factor</b>	2.5"
<b>NAND Flash Type</b>	3D TLC
<b>Capacity</b>	960 ~ 3840GB
<b>External DRAM</b>	Yes
<b>Sustained Read Performance (MB/sec)</b>	Up to 3340
<b>Sustained Write Performance (MB/sec)</b>	Up to 1175
<b>ECC Engine</b>	Low-Density Parity-Check (LDPC) Code
<b>IOPs (4K Random Write)</b>	574K
<b>Standard Operating Temperature ( °C )</b>	0 ~ + 70
<b>Extended Operating Temperature ( °C )</b>	-40 ~ + 85
<b>Storage Temperature ( °C )</b>	-40 ~ + 85
<b>Thermal Sensor</b>	Yes
<b>Shock</b>	Non-operation: 1,500(G), half sine wave
<b>Vibration</b>	Non-operation: 20G, 20~2000 Hz/random
<b>Operating Voltage</b>	12 V ± 5%
<b>Power Consumption</b>	Active mode: 705 mA / Idle mode: 180 mA
<b>Dimension (L x W x H )</b>	100.00 x 69.85 x 7.00 (mm)
<b>MTBF (hours)</b>	>3,000,000

## Mechanical Specification

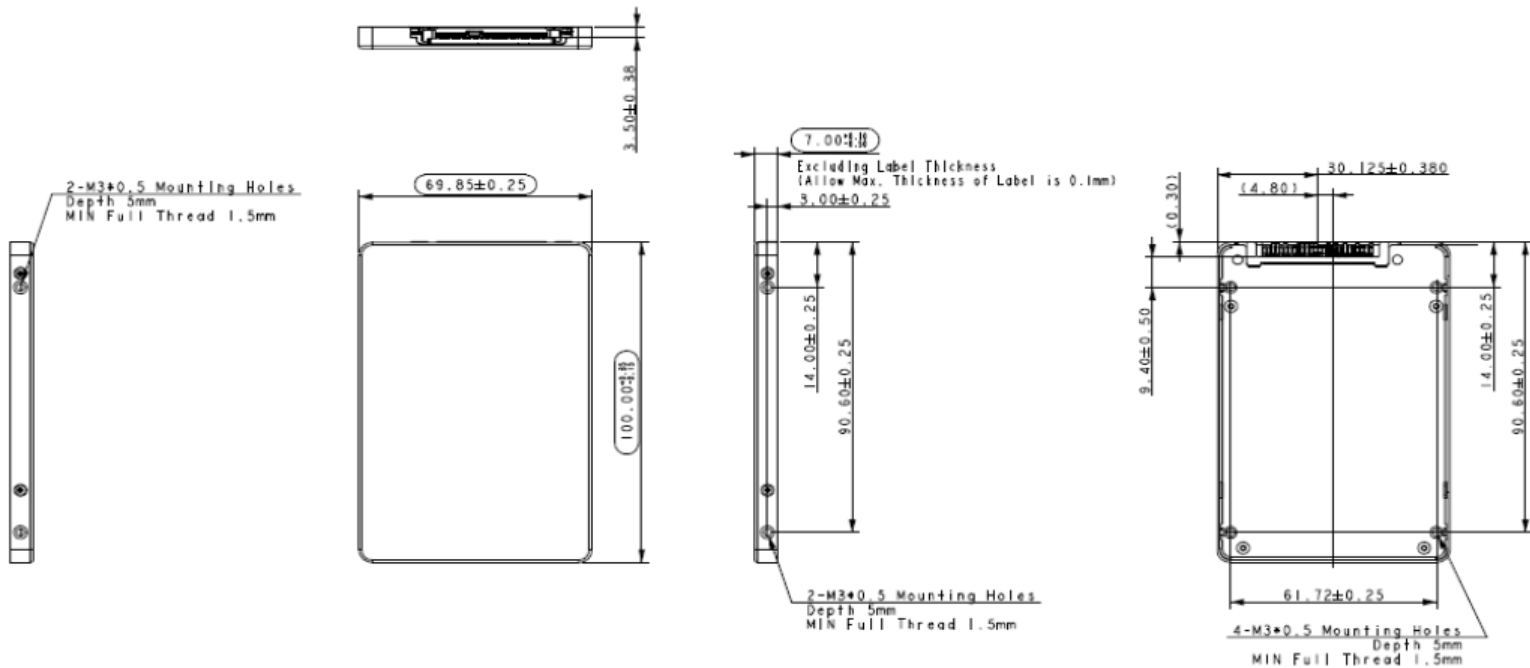

Unit:mm

For more information,  
contact your Apacer representative

### Global Presence

Taiwan (Headquarters)  
Apacer Technology Inc.  
Tel: +886-2-2267-8000  
Fax: +886-2-2267-2261

Europe  
Apacer Technology B.V.  
Tel: +31-40-267-0000  
Fax: +31-40-290-0686

U.S.A.  
Apacer Memory America, Inc.  
Tel: +1-408-518-8699  
Fax: 1-510-249-9551

China  
Apacer Electronic(Shanghai)  
Co., Ltd.  
Tel: +86-21-6228-9939

Japan  
Apacer Technology Corp.  
Tel: +81-3-5419-2668  
Fax: +81-3-5419-0018

India  
Apacer Technologies Pvt. Ltd.  
Tel: +91-80-41529061~3  
Fax: +91-80-41700215